


UNIQUE DRILLING FLUIDS

1222 Commerce St. STE. 2417 Dallas TX 75202: T:214-741-1100: F:214-741-1755 info@uniquedrillingfluids.com

Product Data

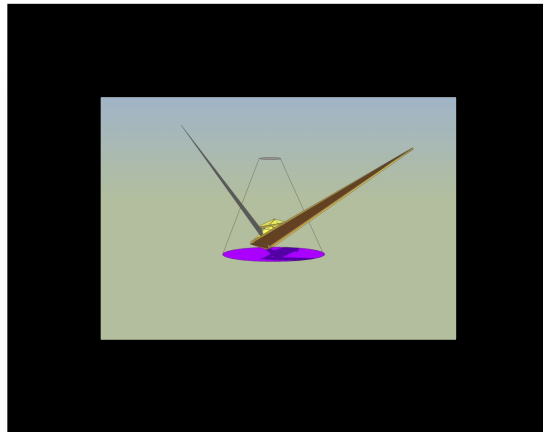

POLY-BRICITY-LB

Lubricating Polymer Bead

DESCRIPTION

POLY-BRICITY-LB is a unique polymer bead that provides environmentally safe lubricating characteristics in drilling fluids. The attractive feature of this lubricant is that it complements any drilling fluid system. Furthermore it helps prevent gumbo balling of the bit and prevents sticking. POLY-BRICITY-LB reduces pipe wear in horizontal drilling and acts as a seepage control agent. It aids when running logging tools to bottom hole and is very easy and safe to mix into any mud system. It is insoluble and reduces torque and drag. It is ideal for horizontal drilling. POLY-BRICITY

4

www.uniquedrillingfluids.com

GIVING THE WELL WHAT IT NEEDS

Properties

Appearance	Colorless
Specific Gravity	1.04
Vapor Density	0
Crush Strength	10,000 psi
Temperature Stability	380°F

SCREEN ANALYSIS

US MESH	10	20	30	40	60	80	100
FINE	-	-	-	0-5	30-70	25-50	0-10
COARSE	-	-	10-90	5-80	0-30	0-8	-
PREMIUM	TRACE	0.1-9	25-34	19-34	21-46	0.0-0.2	TRACE

TREATMENT

REDUCE TORQUE AND DRAG	Initial; 2, Increase to 8
SEEPAGE CONTROL, ppb	2-4 as needed
CONTROL GUMBO BIT BALLING	1
LOGGING, ppb	4 initial

PACKAGING

Fine, course, premium 50 pound bags and can load 40 bags per pallet.

www.uniquedrillingfluids.com

GIVING THE WELL WHAT IT NEEDS