


UNIQUE DRILLING FLUIDS

1222 Commerce St. STE. 2417 Dallas TX 75202: T: 214-741-1100: F: 214-741-1755 info@uniquedrillingfluids.com

Product Data

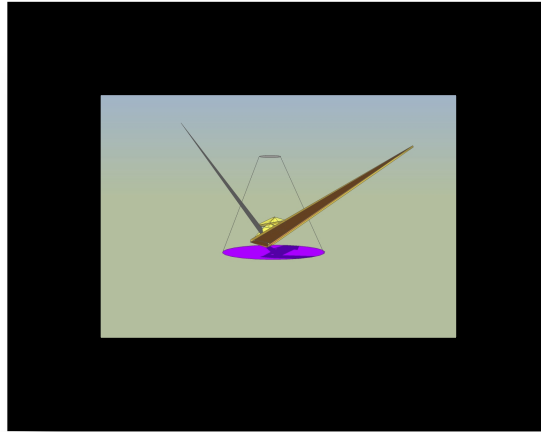

FRIC-SLICK

PIPE ON PIPE LUBRICANT

DESCRIPTION

FRIC-SLICK is unique blend of glycol esters and sulfurized extreme pressure additives formulated to increase lubricity in drilling fluids. FRIC-SLICK is our version of PIPE on PIPE lubricant.

PROPERTIES

APPEARANCE	Brown Liquid
SPECIFIC GRAVITY g/cc	0.92-0.97
pH 1% in H2O	9-10
LC 50, ppm	192,600
POUR POINT (F)	-15
POURABILITY	TEMP (F) 60 50 40 35 30 25
	VISC(CPS)90 111 156 182 216 244.4

www.uniquedrillingfluids.com

GIVING THE WELL WHAT IT NEEDS!

**PERFORMANCE DATA
(COEFFICIENT OF FRICTION)**

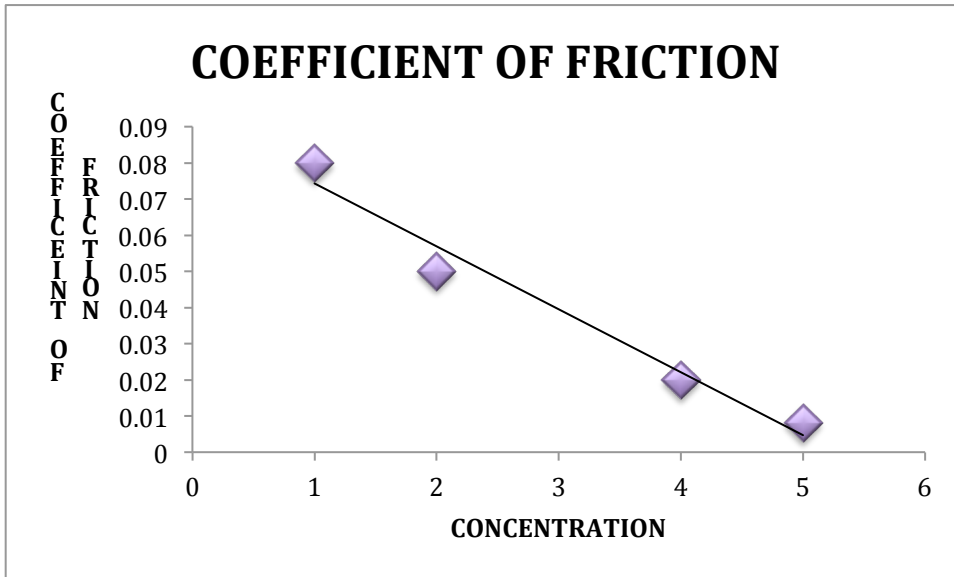


Figure 1. Graph displays performance data measured with lubricity tester. FRIC-SLICK'S coefficient of friction shows that this pipe on pipe lubricant will perform in challenging formations.

PACKAGING

FRIC-SLICK is packaged to the clients request. It is available in pails, drums and totes.

www.uniquedrillingfluids.com

GIVING THE WELL WHAT IT NEEDS!