


UNIQUE DRILLING FLUIDS

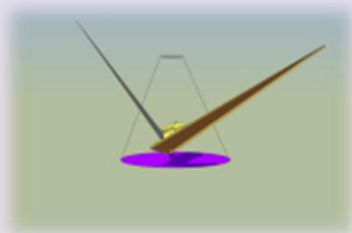

PRODUCT DATA

UDF INC

1222 Commerce St.

Dallas , TX 75202

T:214-741-1100

W:www.uniquedrillingfluids.com

CD-DFOAM-L/CD-DFOAM-P

CD-DFOAM-L is UDF'S environmentally friendly glycol (sugar alcohol) based defoamer used to minimize air entrainment when mixing cement slurries. The chemical responsibility is critical to ensure that target densities are achieved and not surpassed.

APPLICATION

CD-DFOAM-L can be used with the following cement classes (**A, C, G or H**). It is readily used with other cement additives such as **CD-U5-L, CD-U7-L, CFL-UQ-13-L, CR-Q10-L** and our weighting agent **DENSI-UP** (silica flour). **CD-DFOAM-L** is applicable in 400 F°.

PROPERTIES


- Clear Colorless Liquid
- Specific Gravity – 1.01
- Bulk Density – 8.41 lb./gal.
- Absolute Volume – 0.1189 gal./lb.
- Water requirements – none
- Loading Rate – 0.02 to 0.30 gal./sk

www.uniquedrillingfluids.com

“GIVING THE WELL WHAT IT NEEDS!”

QUALITY AMERICAN CHEMICALS

UNIQUE DRILLING FLUIDS

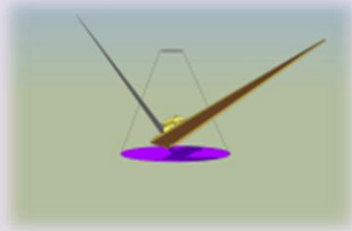

PRODUCT DATA

PACKAGING

CD-DFOAM-L is packaged and can be shipped in 5 gallon pails and or 55 gal drums. The dry material is packaged in multiply lined bags (50lb), however other packaging for liquid and dry material is available upon request.

www.uniquedrillingfluids.com

“GIVING THE WELL WHAT IT NEEDS!”